

CSCI 420 Computer Graphics
Lecture 3

Interaction


Client/Server Model
Callbacks
Double Buffering
Hidden Surface Removal
Simple Transformations
[Angel Ch. 3]

Jernej Barbic
University of Southern California

1

Triangles (Clarification)

- Can be any shape or size
- Well-shaped triangles have advantages for numerical simulation
- Shape quality makes little difference for basic OpenGL rendering



2

Choice of Programming Language


- OpenGL lives close to the hardware
- OpenGL is not object-oriented
- OpenGL is not a functional language (as in, ML)
- Use C to expose and exploit low-level details
- Use C++, Java, ... for toolkits
- Support for C in assignments

3

Client/Server Model

- Graphics hardware and caching


“Client” “Server”



- Important for efficiency
- Need to be aware where data are stored
- Examples: vertex arrays, display lists

4

The CPU-GPU bus

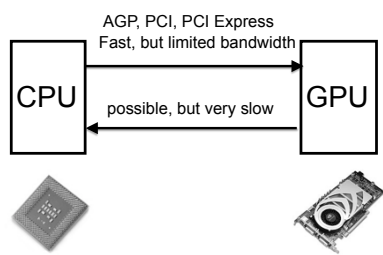


5

Display Lists

- Cache a sequence of drawing commands
- Optimize and store on server (GPU)

“Client” “Server”

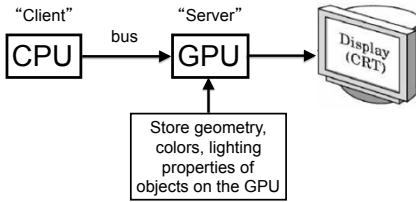

6

Display Lists

- Cache a sequence of drawing commands
- Optimize and store on server (GPU)

```

GLuint listName = glGenLists(1); /* new list name */
glNewList (listName, GL_COMPILE); /* new list */
glColor3f(1.0, 0.0, 1.0);
glBegin(GL_TRIANGLES);
glVertex3f(0.0, 0.0, 0.0);
...
glEnd();
glEndList(); /* at this point, OpenGL compiles the list */
glCallList(listName); /* draw the object */
    
```

7


Display Lists Details

- Very useful with complex objects that are redrawn often (e.g., with transformations)
- Another example: fonts (2D or 3D)
- Display lists can call other display lists
- Display lists cannot be changed
- Display lists can be erased / replaced
- Not necessary in first assignment
- Display lists are now deprecated in OpenGL
- For complex usage, use the VertexBufferObject (VBO) extension

8

Vertex Arrays

- Draw cube with 6*4=24 or with 8 vertices?
- Expense in drawing and transformation
- Strips help to some extent
- Vertex arrays provide general solution
- Advanced (since OpenGL 1.2)
 - Define (transmit) array of vertices, colors, normals
 - Draw using index into array(s)
 - Vertex sharing for efficient operations
- Not needed for first assignment




9

Outline

- Client/Server Model
- Callbacks
- Double Buffering
- Hidden Surface Removal
- Simple Transformations
- Example

10

GLUT Program with Callbacks

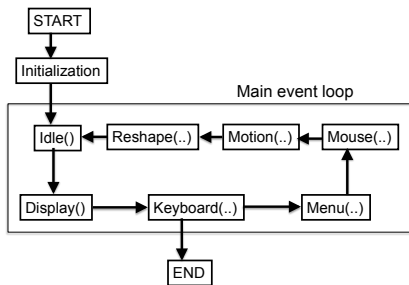

11

Main Event Loop

- Standard technique for interaction (GLUT, Qt, wxWidgets, ...)
- Main loop processes events
- Dispatch to functions specified by client
- Callbacks also common in operating systems
- “Poor man’s functional programming”

12

Types of Callbacks

- Display () : when window must be drawn
- Idle () : when no other events to be handled
- Keyboard (unsigned char key, int x, int y) : key pressed
- Menu (...) : after selection from menu
- Mouse (int button, int state, int x, int y) : mouse button
- Motion (...) : mouse movement
- Reshape (int w, int h) : window resize
- Any callback can be NULL

13

Outline

- Client/Server Model
- Callbacks
- Double Buffering
- Hidden Surface Removal
- Simple Transformations
- Example

14

Screen Refresh

- Common: 60-100 Hz
- Flicker if drawing overlaps screen refresh
- Problem during animation
- Solution: use two separate frame buffers:
 - Draw into one buffer
 - Swap and display, while drawing into other buffer
- Desirable frame rate ≥ 30 fps (frames/second)

15

Enabling Single/Double Buffering

- `glutInitDisplayMode(GLUT_SINGLE);`
- `glutInitDisplayMode(GLUT_DOUBLE);`
- Single buffering:
 - Must call `glFinish()` at the end of `Display()`
- Double buffering:
 - Must call `glutSwapBuffers()` at the end of `Display()`
- Must call `glutPostRedisplay()` at the end of `Idle()`
- If something in OpenGL has no effect or does not work, check the modes in `glutInitDisplayMode`

16

Outline

- Client/Server Model
- Callbacks
- Double Buffering
- Hidden Surface Removal
- Simple Transformations
- Example

17

Hidden Surface Removal

- Classic problem of computer graphics
- What is visible after clipping and projection?
- Object-space vs image-space approaches
- Object space: depth sort (Painter's algorithm)
- Image space: *z-buffer* algorithm
- Related: back-face culling

18

Object-Space Approach

- Consider objects pairwise

- Complexity $O(k^2)$ where $k = \#$ of objects
- Painter's algorithm: render back-to-front
- "Paint" over invisible polygons
- How to sort and how to test overlap?

19

Depth Sorting

- First, sort by furthest distance z from viewer
- If minimum depth of A is greater than maximum depth of B, A can be drawn before B
- If either x or y extents do not overlap, A and B can be drawn independently

20

Some Difficult Cases

- Sometimes cannot sort polygons!

Cyclic overlap
Piercing Polygons

- One solution: compute intersections & subdivide
- Do while rasterizing (difficult in object space)

21

Painter's Algorithm Assessment

- Strengths**
 - Simple (most of the time)
 - Handles transparency well
 - Sometimes, no need to sort (e.g., heightfield)
- Weaknesses**
 - Clumsy when geometry is complex
 - Sorting can be expensive
- Usage**
 - PostScript interpreters
 - OpenGL: not supported (must implement Painter's Algorithm manually)

22

Image-space approach

3D geometry
Depth image
darker color is closer

Source: Wikipedia

23


Depth sensor camera

KINECT
for XBOX 360

24

Image-Space Approach

- Raycasting: intersect ray with polygons




- $O(k)$ worst case (often better)
- Images can be more jagged (need anti-aliasing)

25

The z-Buffer Algorithm

- z-buffer stores depth values z for each pixel
- Before writing a pixel into framebuffer:
 - Compute distance z of pixel from viewer
 - If closer, write and update z-buffer, otherwise discard



26

z-Buffer Algorithm Assessment

- Strengths
 - Simple (no sorting or splitting)
 - Independent of geometric primitives
- Weaknesses
 - Memory intensive (but memory is cheap now)
 - Tricky to handle transparency and blending
 - Depth-ordering artifacts
- Usage
 - z-Buffering comes standard with OpenGL; disabled by default; must be enabled

27

Depth Buffer in OpenGL

- `glutInitDisplayMode(GLUT_DOUBLE | GLUT_RGBA | GLUT_DEPTH);`
- `glEnable (GL_DEPTH_TEST);`
- Inside `Display()`:
 - `glClear (GL_DEPTH_BUFFER_BIT);`
- Remember all of these!
- Some “tricks” use z-buffer in read-only mode

28


Outline

- Client/Server Model
- Callbacks
- Double Buffering
- Hidden Surface Removal
- Simple Transformations
- Example

29

Specifying the Viewing Volume


- Clip everything not in viewing volume
- Separate matrices for transformation and projection
 - `glMatrixMode (GL_PROJECTION);`
 - `glLoadIdentity();`
 - ... Set viewing volume ...
 - `glMatrixMode(GL_MODELVIEW);`



30

Parallel Viewing


- Orthographic projection
- Camera points in negative z direction
- `glOrtho(xmin, xmax, ymin, ymax, near, far)`



31

Perspective Viewing

- Slightly more complex
- `glFrustum(left, right, bottom, top, near, far)`



32

Simple Transformations

- Rotate by given angle (in degrees) about axis given by (x, y, z)

```
glRotate{fd}(angle, x, y, z);
```

- Translate by the given x, y, and z values

```
glTranslate{fd}(x, y, z);
```

- Scale with a factor in the x, y, and z direction

```
glScale{fd}(x, y, z);
```

33

Outline

- Client/Server Model
- Callbacks
- Double Buffering
- Hidden Surface Removal
- Simple Transformations
- Example

34

Example: Rotating Color Cube

- Adapted from [Angel, Ch. 4]
- Problem:
 - Draw a color cube
 - Rotate it about x, y, or z axis, depending on left, middle or right mouse click
 - Stop when space bar is pressed
 - Quit when q or Q is pressed

35

Step 1: Defining the Vertices

- Use parallel arrays for vertices and colors

```
/* vertices of cube about the origin */
GLfloat vertices[8][3] =
{{-1.0, -1.0, -1.0}, {1.0, -1.0, -1.0},
 {1.0, 1.0, -1.0}, {-1.0, 1.0, -1.0}, {-1.0, -1.0, 1.0},
 {1.0, -1.0, 1.0}, {1.0, 1.0, 1.0}, {-1.0, 1.0, 1.0}};
```

```
/* colors to be assigned to vertices */
GLfloat colors[8][3] =
{{0.0, 0.0, 0.0}, {1.0, 0.0, 0.0},
 {1.0, 1.0, 0.0}, {0.0, 1.0, 0.0}, {0.0, 0.0, 1.0},
 {1.0, 0.0, 1.0}, {1.0, 1.0, 1.0}, {0.0, 1.0, 1.0}};
```

36

Step 2: Set Up z-buffer and Double Buffering

```
int main(int argc, char **argv)
{
    glutInit(&argc, argv);
    /* double buffering for smooth animation */
    glutInitDisplayMode
    (GLUT_DOUBLE | GLUT_DEPTH | GLUT_RGB);
    ... /* window creation and callbacks here */
    glEnable(GL_DEPTH_TEST);
    glutMainLoop();
    return(0);
}
```

37

Step 3: Install Callbacks

- Create window and set callbacks

```
glutInitWindowSize(500, 500);
glutCreateWindow("cube");
glutReshapeFunc(myReshape);
glutDisplayFunc(display);
glutIdleFunc(spinCube);
glutMouseFunc(mouse);
glutKeyboardFunc(keyboard);
```

38

Step 4: Reshape Callback

- Set projection and viewport, preserve aspect ratio

```
void myReshape(int w, int h)
{
    GLfloat aspect = (GLfloat) w / (GLfloat) h;
    glViewport(0, 0, w, h);
    glMatrixMode(GL_PROJECTION);
    glLoadIdentity();
    if (w <= h) /* aspect <= 1 */
        glOrtho(-2.0, 2.0, -2.0/aspect, 2.0/aspect, -10.0, 10.0);
    else /* aspect > 1 */
        glOrtho(-2.0*aspect, 2.0*aspect, -2.0, 2.0, -10.0, 10.0);
    glMatrixMode(GL_MODELVIEW);
}
```

39

Step 5: Display Callback

- Clear, rotate, draw, flush, swap

```
GLfloat theta[3] = {0.0, 0.0, 0.0};

void display(void)
{
    glClear(GL_COLOR_BUFFER_BIT
           | GL_DEPTH_BUFFER_BIT);
    glLoadIdentity();
    glRotatef(theta[0], 1.0, 0.0, 0.0);
    glRotatef(theta[1], 0.0, 1.0, 0.0);
    glRotatef(theta[2], 0.0, 0.0, 1.0);
    colorcube();
    glutSwapBuffers();
}
```

40

Step 6: Drawing Faces

- Call face(a, b, c, d) with vertex index
- Orient consistently

```
void colorcube(void)
{
    face(0,3,2,1);
    face(2,3,7,6);
    face(0,4,7,3);
    face(1,2,6,5);
    face(4,5,6,7);
    face(0,1,5,4);
}
```

41

Step 7: Drawing a Face

- Use vector form of primitives and attributes

```
void face(int a, int b, int c, int d)
{
    glBegin(GL_POLYGON);
    glColor3fv(colors[a]);
    glVertex3fv(vertices[a]);
    glColor3fv(colors[b]);
    glVertex3fv(vertices[b]);
    glColor3fv(colors[c]);
    glVertex3fv(vertices[c]);
    glColor3fv(colors[d]);
    glVertex3fv(vertices[d]);
    glEnd();
}
```

42

Step 8: Animation

- Set idle callback

```
GLfloat delta = 2.0;
GLint axis = 2;
void spinCube()
{
    /* spin the cube delta degrees about selected axis */
    theta[axis] += delta;
    if (theta[axis] > 360.0) theta[axis] -= 360.0;

    /* display result (do not forget this!) */
    glutPostRedisplay();
}
```

43

Step 9: Change Axis of Rotation

- Mouse callback

```
void mouse(int btn, int state, int x, int y)
{
    if ((btn==GLUT_LEFT_BUTTON) && (state == GLUT_DOWN))
        axis = 0;

    if ((btn==GLUT_MIDDLE_BUTTON) && (state == GLUT_DOWN))
        axis = 1;

    if ((btn==GLUT_RIGHT_BUTTON) && (state == GLUT_DOWN))
        axis = 2;
}
```

44

Step 10: Toggle Rotation or Exit

- Keyboard callback

```
void keyboard(unsigned char key, int x, int y)
{
    if (key=='q' || key == 'Q')
        exit(0);
    if (key==' ')
        stop = !stop;
    if (stop)
        glutIdleFunc(NULL);
    else
        glutIdleFunc(spinCube);
}
```

45

Summary

- Client/Server Model
- Callbacks
- Double Buffering
- Hidden Surface Removal
- Simple Transformations
- Example

46

Announcements

- Assignment 1 will be posted this week
- Microsoft Visual Studio (Windows) access enabled via Microsoft's MSDN
- Please start early
- Check web page for instructions

47